

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A





B

C

D

E

F

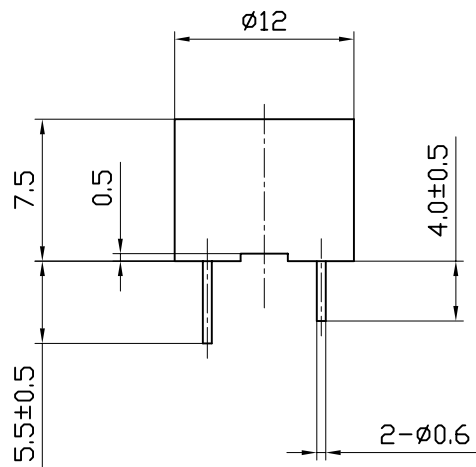

SPECIFICATION

- 1. Rated Voltage 12VDC
- 2. Operating Voltage 8~15VDC
- 3. Max. Rated Current 30mA/12VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g

Compliance with RoHS	
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
Magnetic Buzzer MICROS KPX-G1212B-1666	
UNIT	DWG NO.
mm	OEM1666R
SCALE	SHEET
NOT TO SCALE	VER 1.2

No.	DESCRIPTION	APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	
X	±	DRAWN	LXB 07.08.16
.XX	±	CHECKED	LXB 07.08.16
.XXX	±	APPROVED	WDY 07.08.16
90° FORMED ANGLES		FIRST ANGLE PROJECTION	